

Description



PRINCO's L2631 NULL-KOTE™ two-wire RF level transmitter can be used to measure the level of virtually any process material, from low-dielectric (insulating) products, such as refined oils, to conductive slurries— even viscous materials that cling to the probe. Advanced NULL-KOTE™ circuit design means accurate readings even when conductive material builds up on the probe.

Superior temperature stability and noise immunity, conformally coated circuit boards, self-diagnostics and factory precalibration mean accurate, reliable, easy-to-install level instrumentation. The L2631's 4 to 20 mA dc output signal is proportional to the process level. Zero and span adjustments are non-interacting. Our Easy-On probe gives you reliable, automatic connection when the probe is screwed into the electronics housing.

The need for continuous level measurement is nearly universal in the process industries. Today's processing plants must operate at peak efficiency, minimize labor and material costs, insure on-time delivery of product and eliminate spills of even marginally hazardous materials. Accurate, reliable, continuous level measurement is a vital part of their operation. In millions of installations, spanning more than 85 years of experience, PRINCO process instruments have provided accurate, dependable, long lived service for all types of industries.

Applications

- Water-based liquids
- Acids
- Hydrocarbons and solvents
- Powders and granulars
- Oils

Features

- **NULL-KOTE™ Circuitry** – Makes the sensor immune to adverse effects of conductive coating build up.
- **Designed to Survive** – RF immune, vibration-proof, and conformally coated (tropicalized) circuit boards for additional protection – at no extra cost.
- **Explosion-Proof/Weatherproof Housing** – Class I, II, III, Div.1, Groups C, D, E, F, & G - NEMA 4.
- **Simple Two-Wire Connection** – Means low installation cost and compatibility with most process control systems.
- **Polarity Reversal Protection**
- **Factory Precalibrated** – Field calibration, if needed, is quick and easy. No interaction between span and zero.
- **Easy to Install** – Probe and electronics install as single unit. No cable, delicate connectors, or separate enclosure.
- **Wide Temperature Range** – Standard process temperature: -300 to 500°F (-184 to 260°C).
- **Built-In Self Diagnostics** – Provides assurance that the system is working properly.
- **Easy-On Probe Connection** – Automatically provides simple, fast installation and reliable operation without wires, connectors, or terminal strips. Simply screw probe into the housing.
- **Ten-Year Warranty** – The only level instruments available with this unique assurance of quality.

L100 Series Continuous Level Probes

Probes used with the L2631 are designated as the L100 Series.

A variety of types and construction materials are available: flexible (cable type) or rigid, heavy or light duty Teflon™ or Kynar™ sheathing, NPT hub or flanged mounted, single or dual construction.

All probes are manufactured to the exact length required.

MODEL NO.	ELEMENT CONFIGURATION	TYPE	VESSEL CONNECTION	INSULATION OPTIONS
L101	Single	Rigid	1" NPT	B, KP, KS, TP, TS
L104	Single	Rigid	1", 2", 3" OR 4" TRI-CLAMP™	B, KP, KS, TP, TS
L102	Dual Concentric	Rigid	1½" NPT	B, KP, KS, TP, TS
L107	Dual Concentric	Rigid	1" NPT	B, KS, TP, TS
L109	Single	Flexible	1" NPT	KW, TW
L113	Dual Parallel	Flexible	1" NPT	KW, TW
L115	Dual Parallel	Flexible	3" Flange	KW, TW
L116	Dual Parallel	Flexible	3" Flange	KW, TW
L127	Dual Parallel	Rigid	3" Flange	B, KP, KS, TP, TS
L128	Dual Parallel	Rigid	3" Flange	KP, KS, TP, TS


KP = Kynar® Pipe (60 mil Kynar over carbon steel)
 KS = Kynar Sheath (17 mil Kynar over 316 SS rod)
 KW = Kynar Wire (20 mil Kynar over 316 SS wire rope)
 B = Bare (No insulation)
 TP = Teflon® Pipe (60 mil PFA Teflon over 316 SS rod)
 TS = Teflon Sheath (17 mil Teflon over 316 SS rod)
 TW = Teflon Wire (12 mil Teflon over copper wire)

Model Number	Probe	Pressure Rating (PSI) at Temperature Indicated (°F)						
		-300	40	100	250	300	400	500
L101, L102, L104, L107, L109, L113	Teflon or Bare	1250	1250	1250	550	450	350	0
	Kynar	N/A	1000	1000	250	0	N/A	N/A
L115, L116, L127, L128	Teflon or Bare	275 ¹	275 ¹	275 ¹	225 ¹	210 ¹	180 ¹	0
	Kynar	N/A	275 ¹	275 ¹	225 ¹	0	N/A	N/A

1. Rating of Carbon Steel 150 lb. flange. For higher ratings, consult factory.

L2631 Specifications

TYPE	Self-diagnostic, NULL-KOTE™, RF Impedance sensing two-wire, level to current transmitter.
POWER REQUIREMENTS	20 to 28 Vdc at 20mA.
AMBIENT TEMPERATURE	-40 to 150 °F (-40 to 66 °C)
SPAN RANGE	From 0.5 to 100 ft. typical.
REPEATABILITY/ LINEARITY	0.5% of span maximum over entire range span.
TEMPERATURE STABILITY	Maximum error of 0.16% of span per 30°F (17°C) change, or within 1% of span over entire 190°F ambient temperature span.
REMOTE MOUNTING DISTANCE	Up to 50 feet (cable connected) for all but the shortest span values.
PROCESS CONDUCTANCE	Tolerates process-coating conductance up to 2000mS (500 ohms of composite resistance).
ELECTRONIC HOUSINGS	Explosion-proof Class I, II, III, Div. 1, Groups C, D, E, F, & NEMA4.

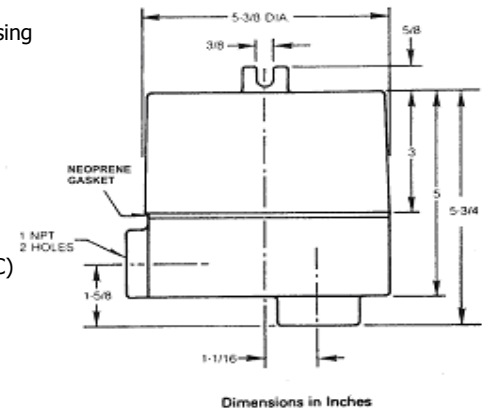

10 Year Warranty

All PRINCO RF impedance level control instruments are backed by a 10-year warranty. PRINCO will repair or replace, at our option, any instrument that fails under normal use up to 10 years after purchase.

2013-1

PRINCO™

1020 Industrial Blvd., Southampton, PA 18966-4095
 800-221-9237 ~ 215-355-1500
 FAX: 215-355-7766 www.PrincoLevelControls.com