


## Description

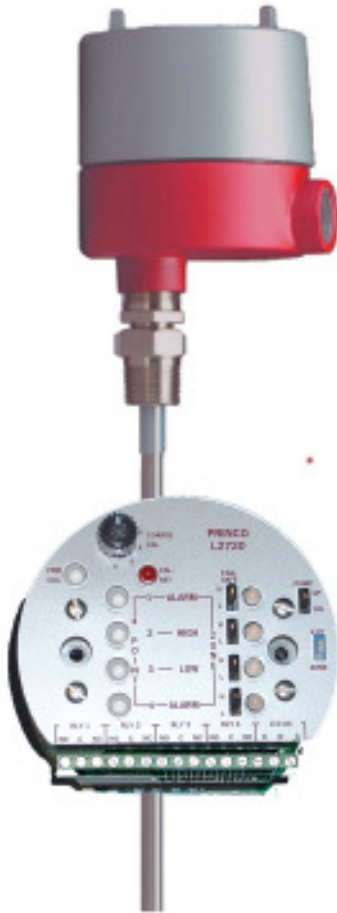

PRINCO's L2720 Versa-Point™ gives you the option of either four independent set points or zone control with two additional set points.

When set up as a four-point level controller, it is an ideal multiple point level alarm for applications requiring high alarm, high-high alarm, low alarm, and low-low alarm, all operating from a single probe.

As a zone control with two additional level points, it is ideal for lift stations, batching operations, and industrial sumps.

Both set points, which define the zone as well as the two level points, are independently adjustable.

Mode of operation for zone control may be selected for either pump-up or pump-down. Likewise, the level points, whether high or low, may always be operated fail-safe.

The zone may occupy virtually any portion of the overall range, from 1 to 100 percent. Location of the level points may also be anywhere in the overall range, outside or inside the zone.

All set points and zone limits may be independently set for either high or low fail-safe.

## Applications

- Water-based liquids
- Acids
- Hydrocarbons and solvents
- Powders and granulars
- Oils

## Features

- **Wide Range of Applications**— The ideal multiple-point controller. It operates in conjunction with process products which range from electrically insulating materials, such as refined oils, to conductive slurries; even sticky materials that tend to cling to the probe.
- **NULL-KOTE™ Circuitry** – Makes the sensor immune to adverse effects of conductive coating build up.
- **Designed to Survive** – RF immune, vibration-proof, and conformally coated (tropicalized) circuit boards for additional protection – at no extra cost.
- **High or Low Fail Safe** - Field selectable for each point.
- **Flexibility** - Each point and zone can be adjusted for any point on the probe.
- **Unique (two color) Status LED** - Indicates presence or absence of material.
- **Easy to Install** – Probe and electronics install as single unit. No cable, delicate connectors, or separate enclosure.
- **Wide Temperature Range** – Standard process temperature: -300 to 500°F (-184 to 260°C).
- **Quick Calibration** – Easy, rapid set up and adjustment. Factory precalibration available.
- **Easy-On Probe Connection** – Automatically provides simple, fast installation and reliable operation without wires, connectors, or terminal strips. Simply screw probe into the housing.
- **Explosion-Proof/Weatherproof Housing** – Class I, II, III, Div.1, Groups C, D, E, F, & G - NEMA 4.
- **Ten-Year Warranty** – The only level instruments available with this unique assurance of quality.

## L100 Series Continuous Level Probes

Probes used with the L2720 are designated as the L100 Series.

A variety of types and construction materials are available: flexible (cable type) or rigid, heavy or light duty Teflon™ or Kynar™ sheathing, NPT hub or flanged mounted, single or dual construction.

All probes are manufactured to the exact length required.

MODEL NO.	ELEMENT CONFIGURATION	TYPE	VESSEL CONNECTION	INSULATION OPTIONS
L101	Single	Rigid	1" NPT	B, KP, KS, TP, TS
L104	Single	Rigid	1", 2", 3" OR 4" TRI-CLAMP™	B, KP, KS, TP, TS
L102	Dual Concentric	Rigid	1½" NPT	B, KP, KS, TP, TS
L107	Dual Concentric	Rigid	1" NPT	B, KS, TP, TS
L109	Single	Flexible	1" NPT	KW, TW
L113	Dual Parallel	Flexible	1" NPT	KW, TW
L115	Dual Parallel	Flexible	3" Flange	KW, TW
L116	Dual Parallel	Flexible	3" Flange	KW, TW
L127	Dual Parallel	Rigid	3" Flange	B, KP, KS, TP, TS
L128	Dual Parallel	Rigid	3" Flange	KP, KS, TP, TS


KP = Kynar® Pipe (60 mil Kynar over carbon steel)  
 KS = Kynar Sheath (17 mil Kynar over 316 SS rod)  
 KW = Kynar Wire (20 mil Kynar over 316 SS wire rope)  
 B = Bare (No insulation)  
 TP = Teflon® Pipe (60 mil PFA Teflon over 316 SS rod)  
 TS = Teflon Sheath (17 mil Teflon over 316 SS rod)  
 TW = Teflon Wire (12 mil Teflon over copper wire)

Model Number	Probe	Pressure Rating (PSI) at Temperature Indicated (°F)						
		-300	40	100	250	300	400	500
L101, L102, L104, L107, L108, L113	Teflon or Bare	1250	1250	1250	550	450	350	0
	Kynar	N/A	1000	1000	250	0	N/A	N/A
L115, L116, L127, L128	Teflon or Bare	275 <sup>1</sup>	275 <sup>1</sup>	275 <sup>1</sup>	225 <sup>1</sup>	210 <sup>1</sup>	180 <sup>1</sup>	0
	Kynar	N/A	275 <sup>1</sup>	275 <sup>1</sup>	225 <sup>1</sup>	0	N/A	N/A

1. Rating of Carbon Steel 150 lb. flange. For higher ratings, consult factory.

## L2720 Specifications

TYPE	NULL-KOTE™ (coating immune) RF impedance-sensing, zone & multiple-point level controller.
ZONE ADJUSTMENT RANGE	1 to 100 % of probe length.
SPAN RANGE	From 0.5 to 300 feet typical. Shorter and longer spans available with special probes; consult factory.
CAPACITANCE RANGE	20pf to 20,000pf.
AMBIENT TEMPERATURE	-40 to 150 °F (-40 to 66 °C)
PROCESS TEMPERATURE	Teflon: -300 to 500°F (-184 to 260°C). Kynar: -40 to 300°F (-40 to 149°C).
RELAY CONTACTS	SPDT rated 5 A, 115 Vac, resistive
POWER REQUIREMENTS	95 to 135 Vac, 50 to 60Hz, 5 watts; or 207 to 253 Vac, 5 watts; or 21 to 26 Vdc, 5 watts.
ELECTRONIC HOUSINGS	Explosion-proof Class I, II, III, Div. 1, Groups C, D, E, F, & G . NEMA4.

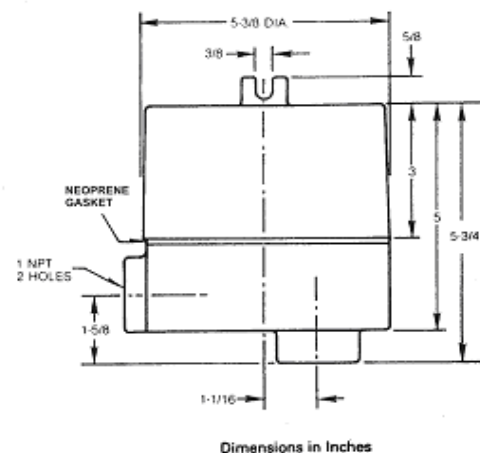

## 10 Year Warranty

All PRINCO RF impedance level control instruments are backed by a 10-year warranty. PRINCO will repair or replace, at our option, any instrument that fails under normal use up to 10 years after purchase.

2013-1

# PRINCO™

1020 Industrial Blvd., Southampton, PA 18966-4095  
 800-221-9237 ~ 215-355-1500  
 FAX: 215-355-7766 www.PrincoLevelControls.com